

Battery is made in AGM technology, constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, battery can use in any direction without leakage. Battery has a pressure relief valve that allow safe dispersal of any pressure excess inside the cell (VRLA). Due to advantages as sealed, maintenance free, low internal resistance and long term storage, EP batteries are the base of the emergency power supplying.




TECHNICAL DATA

Nominal voltage	6 V	
Nominal capacity	3 Ah / C ₂₀	
Cell per unit	3	
Technology	AGM	
Design life	6~9 years @ 20°C*	
	5 years @ 25°C	
Dimensions	height	66,0 mm
	length	134,0 mm
	width	34,0 mm
Weight	~0,65 kg	
	Capacity @ 25°C	
Capacity @ 25°C	20h 150mA @1,75V/cell	3,00 Ah
	10h 285mA @1,75V/cell	2,85 Ah
	5h 510mA @1,75V/cell	2,55 Ah
	1h 1966mA @1,60V/cell	1,97 Ah
Ambient nominal temperature range	charge	0°C ~ 40°C
	discharge	-20°C ~ 50°C
	storage	-20°C ~ 40°C
Internal resistance	@ fully charge battery	≤25 mΩ
Charging voltage @ 20°C	standby use	6,75V to 6,9V (-9 mV/°C)
	cycle use	7,2 V to 7,5V (-12 mV/°C)
Charging current	recommended	0,3 A
	maximum	0,9 A
Maximum discharge current (for 5 sec)	45 A	
Capacity retention during storage @ 20°C (self discharge)	after 1 month	97 %
	after 6 months	80 %
	after 12 months	63 %
Container material	standard	ABS UL 94-HB
	optional	ABS UL 94-V0**
Terminal	faston F1	T1
Terminal hardware initial torque	-	


APPLICATIONS

- uninterruptible power supplies (UPS)
- emergency lighting systems
- telecommunication PABX
- cash registers and fiscal printers
- fire and security systems
- solar powered systems
- medical equipment
- mobile and portable equipment – cycle use
- measuring devices

DIMENSIONS

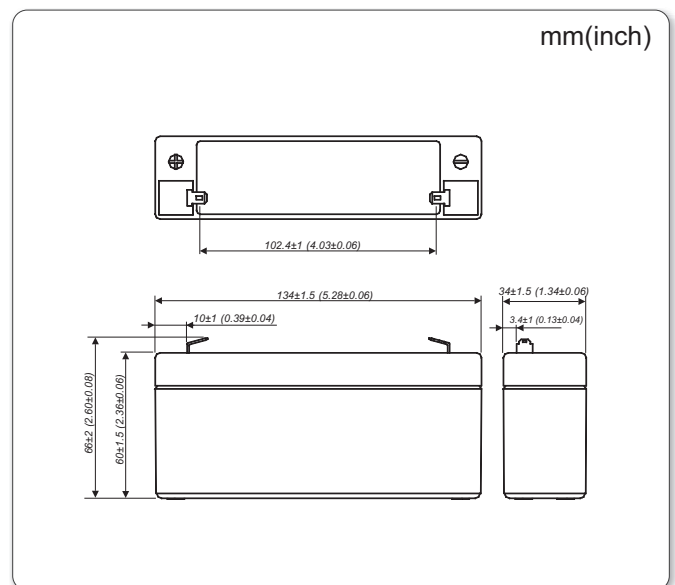

TERMINALS

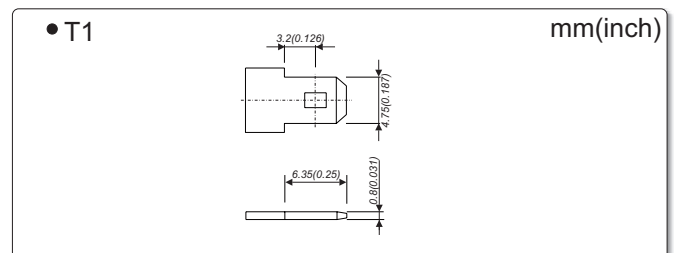

*) - According to Eurobat (General Purpose group) **) - Flame-retardant

NO TRANSPORT RESTRICTED

Not restricted for air, surface and water transport. Classified as non-hazardous material (IATA/ICAO Special Provision A67, DOT-CFR Title 49 parts 171-189, IMDG amendment 27)

DISCHARGE CHARACTERISTICS

• Constant current (Current [A], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,80	9,772	7,029	5,564	3,226	2,128	1,835	1,000	0,587	0,434	0,338	0,281
1,75	11,52	7,615	5,820	3,349	2,197	1,890	1,026	0,597	0,440	0,343	0,285
1,70	12,24	7,889	6,000	3,426	2,241	1,924	1,040	0,602	0,443	0,345	0,286
1,65	12,79	8,078	6,138	3,474	2,268	1,947	1,049	0,605	0,444	0,346	0,287
1,60	13,21	8,239	6,261	3,508	2,291	1,966	1,058	0,608	0,445	0,347	0,287
1,50	13,74	8,404	6,386	3,544	2,314	1,986	1,066	0,609	0,445	0,347	0,287

• Constant power (Power [W/cell], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,85	16,57	14,26	12,43	10,09	5,97	4,34	3,485	2,444	1,931	1,414	1,141
1,80	18,08	15,33	13,31	10,66	6,35	4,58	3,639	2,545	2,001	1,457	1,174
1,75	20,92	17,34	14,42	11,15	6,59	4,73	3,748	2,617	2,052	1,487	1,194
1,70	22,23	18,20	14,94	11,50	6,74	4,83	3,816	2,659	2,079	1,500	1,204
1,65	23,23	18,85	15,29	11,76	6,83	4,89	3,861	2,683	2,098	1,510	1,210
1,60	24,00	19,35	15,60	12,00	6,90	4,94	3,900	2,712	2,115	1,520	1,215

F.V. - Final voltage


Battery life characteristics of standby use

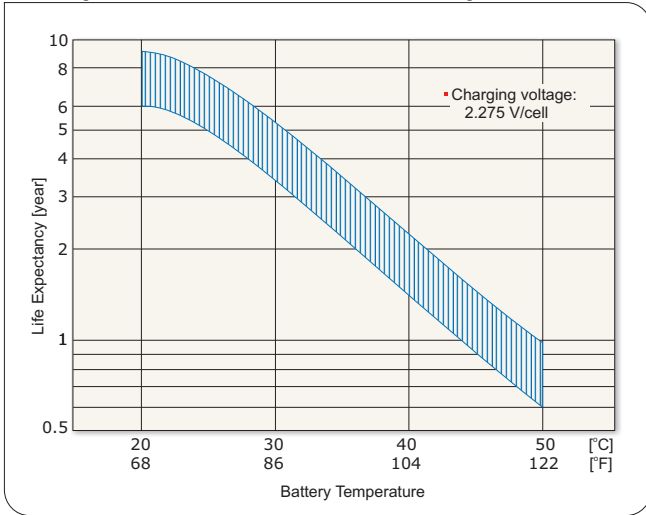


Battery life characteristics of cycle use

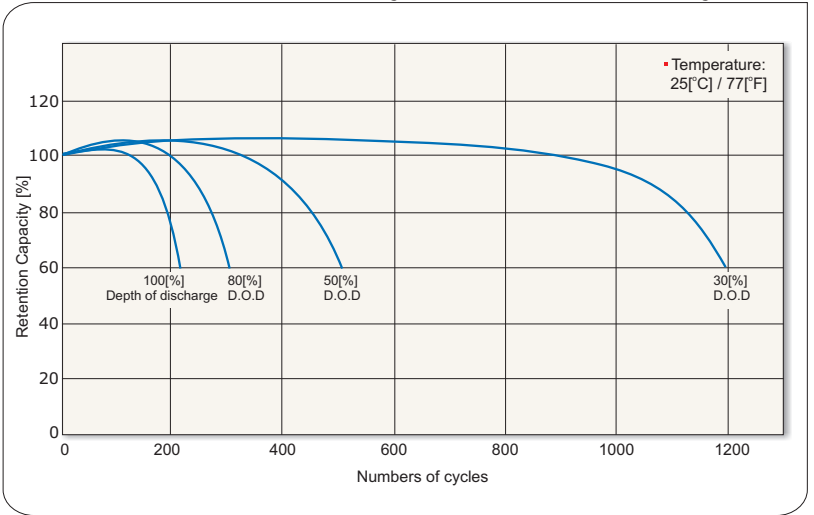


Battery discharge characteristics

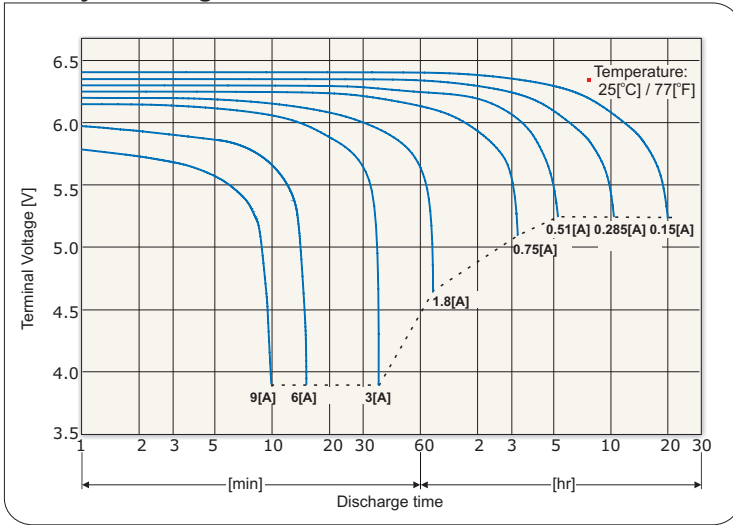


Battery self discharge characteristics

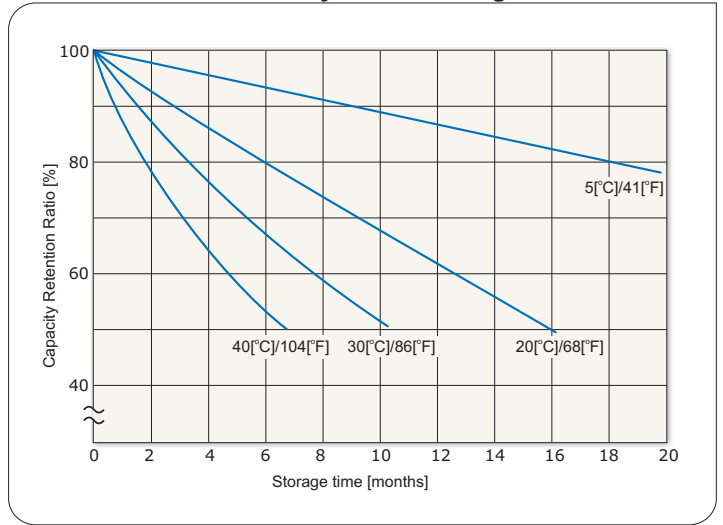

Battery charging characteristics for the standby use

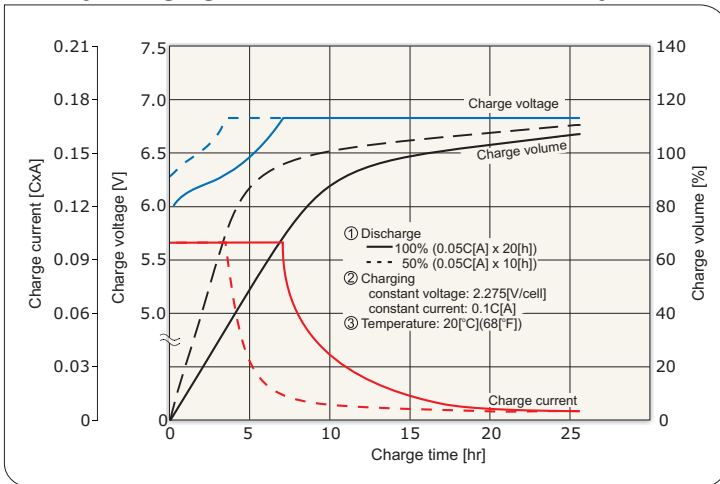

Battery charging characteristics for the cycle use

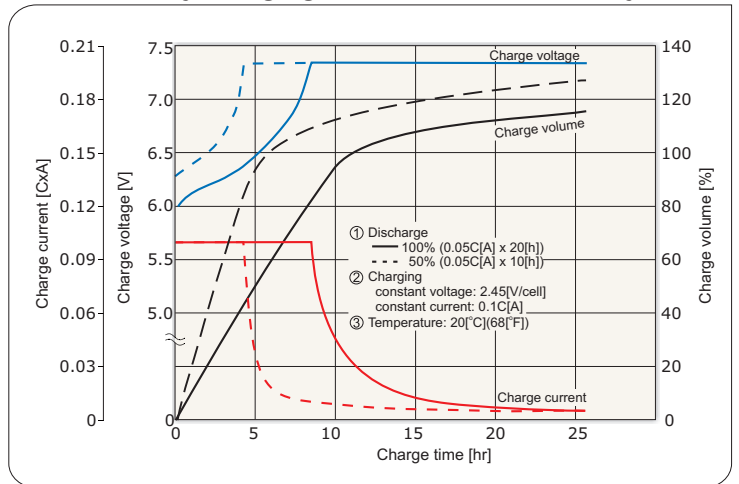

Battery discharge current and final discharge voltage

Discharge current [A]	0.6 > I	0.6 ≤ I < 1.5	1.5 ≤ I < 3	3 ≤ I
Final discharge voltage [V/cell]	1.75	1.70	1.55	1.30

*) C - Capacity

