
EcoTank Printers L3100/L3101





The all-new EcoTank Printer from Epson

Smart and compact, the all-new EcoTank L3100 and L3101 printers from Epson have a very small footprint. A stunning resolution of up to 5,760 dpi and low printing costs help you print A4-sized documents, letters, photos and reports of the finest quality at 7 paise per print. A print speed of up to 33 ppm enables high-speed printing. Ideal for home printing.

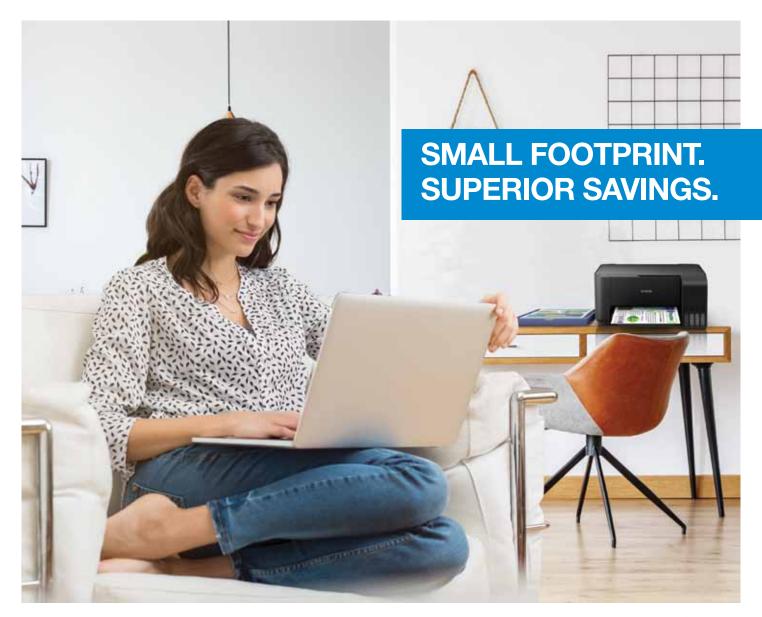









IDEAL FOR HOME

Highly-Compact Design

With the ink tank perfectly integrated, the EcoTank L3100 and L3101 are built to fit anywhere.



Flawless Connectivity WiFi capability helps you print wirelessly with ease.

High Page Yields

With a page yield of 4,500 pages (black) and 7,500 pages (colour), you can print non-stop.

*WiFi and WiFi Direct cannot be used simultaneously. *Source: IDC Asia-Pacific Quarterly Hardcopy Peripherals Tracker FY2020 Q1. Volume Market Share of A4 Inkjet Printers and MFPs.

SPECIFICATIONS EcoTank L3100/L3101



179 mm (7 ")

347 mm (13.7 ")

Prime type: Print Som Corg. Print Print Som Corg.			EXCE
Printing Orderwork interf Proceedings Descense Descense Descense Noted Configuration High Instance		<u>L3100</u> <u>L3101</u>	
Name Ownersky Ownersky File All Block 1990 New Dark Gorg and State Sta		Print, Scan, Copy	Dimensions & Weight
Number Companies Its 1 transmission Its 1 records much del 1 records aprode National Winget 6.9 ag (0.0.10) Marinar In Margan Shadhan Sta 1.600 g (1.0.10) Sta 1.600 g (1.0.10) <td< td=""><td>•</td><td>On domand inkint (Diazoolootria)</td><td>-</td></td<>	•	On domand inkint (Diazoolootria)	-
Pice Disclosion Pice Section (Pice Disclosion) Midiation Report Viana Pice Midiation Report Viana Pice Pice Transmitt Dist 2 (Pice Disclosion) Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Dist / Add Dist Pice Dist Pice Copy Dist Dist Dist / Add Dist Pice Copy Dist Pice Dist Pice Dist Pice Copy Dist Dist Pice Dist Pice Copy Dist Pice Dist Pice Dist Pice Copy Dist Pice Dist Pice Dist Pice Dist Pice Dist Pice Dist			
Name in the Source in			.
Minum In Droper Mulane j.f.			
Pin IS boyn'			
DD 2012AL AL BiteSA (Coloral Parter Language Service Language in Color 10 (pm / 1.2 (pm) (A.2 (PA / A.2 (
Photo Duals, 1 Vis 1 So (m / 4 vis 1 ⁻³) Approx. We are pay finds (Bordehus) Approx. We are pay finds (Bordehus) Cory Steed EGC / PA EGC / PA System (1.8 °) (Go 2) Steed EGC / PA EGC / PA (1.8 °) (1.8 °) (Go 2) Steed EGC / PA EGC / PA (1.8 °) (1.8 °) (Go 2) Steed EGC / PA EGC / PA (1.8 °) (1.8 °) (Go 2) Steed EGC / PA EGC / PA (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8 °) (1.8 °) (1.8 °) Steamed Type Field colour intage conner (1.8	Draft Text - Memo, A4 (Black ^{*1} / Colour ^{*2})	Up to 9.2 ipm / 4.5 ipm	the second se
Pinter language PSO/PA T Copy page Stand Pinter All Pinter Stand Pinter All Pinter Pinter Pinter All Pinter Pinter Pinter Pinter All Pinter Pint	ISO 24734, A4 (Black / Colour)	Simplex: Up to 10 ipm / 5.0 ipm	111
Corpy Gend (14.8.7) Corpy Gend (14.8.7) UB 3 2016.A, K. Singles (Biox / Coard) Up to 7.0 (pm / 1.7 (Photo Default - 10 x 15 cm / 4 x 6 " "2 "3	Approx. 69 sec per photo (Border) / 90 sec per photo (Borderless)	→ 1
Corp Speed Up 0 2018/0, Minute Data varue White, Data / Standard Procession Speed Procession Speed Corp O 2018/0, Minute Data varue White, Data / Standard Corput o 2018/0, Minute Data varue White, Data / Standard Procession Speed	Printer Language	ESC / P-R	375 mm
bit D2 SM x Singles (Biox / D2 (m) / 1.2 (m) Automa Copyes from Sinandam (D2 (m) / 1.2 (m) / 1	Copying		(14.8 ")
Cory Usary Colar / Starks and Whete, Darl	Copy Speed		
Maintam Copies from Standalom 12 copies 1 price accel plage per listed of Appinger in the other Appinger in the otheoth	ISO 29183, A4, Simplex (Black / Colour)	Up to 7.0 ipm / 1.7 ipm	
Aluminum Cory Stoc Al. Letter Initial of pain bases in the pain	Copy Quality	Colour / Black-and-White; Draft / Standard	
Maximum Corgy Stes Al., Latter one package prival gased amore Searching Pipe Construction one package prival gased amore Searching Pipe one package prival gased amore Pipe one package prival gased amore Pipe <thode pipe<="" th=""> <thode pipe<="" th=""> one package</thode></thode>	Maximum Copies from Standalone	20 copies	
action type Pathe colour range scanner state Colour Colour State State <t< td=""><td>Maximum Copy Size</td><td>A4, Letter</td><td>cm photo print speed when p</td></t<>	Maximum Copy Size	A4, Letter	cm photo print speed when p
Soame Type Ruthed colour image scanner onthese, type of page rung scanner onthese, type of type rung scanner onthese, type rung scanner onthese, type rung scanner onthese rung scann	Scanning		
Ander Solution Dec Compute Compute Maintum Scar Area 216 a 217 mm (36 a 117 ") Compute Compute <t< td=""><td>Scanner Type</td><td>Flatbed colour image scanner</td><td>software, type of paper used</td></t<>	Scanner Type	Flatbed colour image scanner	software, type of paper used
Optical Resolution Object / 1000 object Optical Resolution Optic	Sensor Type	CIS	
Scaree file Depth Generation Colour Generation Colour Generation Colour Start & With Start & Wi	Optical Resolution	600 x 1200 dpi	·
Scame BL Oppin 48-bit nput, 24-bit output 11		216 x 297 mm (8.5 x 11.7 ")	
Gragestale Base Ak White Stars Ak Ak White Stars Ak White Stars Ak White Stars A			
Back K White 16-bit input. 1-bit output If and it is control is con			
San Speed Platbad) If sec If sec <tdif sec<="" td=""> If sec If</tdif>			
Monochrom 200 dpi 1 sec Bits Tru Bits Tru <t< td=""><td></td><td>16-bit input, 1-bit output</td><td></td></t<>		16-bit input, 1-bit output	
Colour 200 dpi 37 acc and acc Paper Mandling Priction field 31 acc 2 When printed on Epson P Paper Field Mahod Priction field 31 acc 31 acc Number of Paper Trays 1 42 Method on Paper Maio 42 Method macrosoft Input Capacity 100 sheets, A4 Plain paper (80 g/m) 42 betters-Premium Glossy Photo Paper 10 sheets-Envelope, 30 sheets-Postcard patternet in bottle part of Paper Trays Paper Size 20 sheets, Premium Glossy Photo Paper 10 sheets-Envelope, 30 sheets-Postcard primer share bar in bottle paper (80 g/m) Paper Size Logal, Indan-Logal (21 x 345 mm), 65 x 137, Letter, A4, 10k (195 x 270 mm), 85 A5, 86, A6, Hagaki (100 x 148 mm), 75 acc (90 Asia Paper) Primer share MRPS, Traito C Maximum Paper Size 215 9 x 1200 mm (8.5 x 47.247) Pomm to p. lett, right, bottlem via custom actings in printer driver rd Printer acc MPPS, Traito C USB USB 2.0 Nutwork - Printer acc MPPS, Traito C Printer acc MPPS, Traito C <td< td=""><td></td><td></td><td></td></td<>			
Dotset Dotset Page Facility Page Face Method Protect feed Method Protect feed Method Page Face Method			
Pape Fedd Method Friction feed 1 2 Burdener preving is sug 100 arbetes preving is sug 100 arbetes. Ar Plain paper (80 g/m) Up at 02 arbetes.Previnum Glossy Photo Paper 20 arbetes. Previnum Glossy Photo Paper 21 fibs x 137. Letter, A4, 16K (195 x 270 nm), B5, A5, B6, A6, Hagaki (100 x 148 mm), 35. X ⁺ , 4 X 97. Etwolopet: 410. DL, C0 X1 fibs x 120 nm (8. 5 x 72.4 X) Yource: IDO Asia Pacific Values Margin Maximum Paper Size 21 fibs x 120 nm (8. 5 x 72.4 X) Yource: IDO Asia Pacific Values Margin Values Margin		37 sec	-
Number of Paper Trajs 1 otherwise 3 mm too, left, " Output Capacity otherwise 3 mm too, left, " Description Output Capacity Output Capacity 100 stheets, A4 Plain paper (80 g/m) ''u Description 'u Description <th'u descripti<="" td=""><td></td><td>Fristian food</td><td></td></th'u>		Fristian food	
Paper Hold Capacity 100 sheets. A4 Plain paper (80 g/m?) 50 objects 70 objects			otherwise 3 mm top, left, r
Input Capacity 100 sheets, AP lain paper (80 g/m ²) 5 Quoted (edia or based) Output Capacity 20 sheets, AP lain paper (80 g/m ²) 5 Quoted (edia or based) Paper Size Logal, Indian-Logal (25 K 34 Smm), 85 K 13", Letter, A4, 18K (195 x 270 mm), 85, A5, 86, A6, Hagaki (100 x 148 mm), 5 x 77, 4 x 6", Envelopes: #10, DL, C6 5 output Capacity Maximum Paper Size 215 8 x 1200 mm (8.5 x 47.2 x) 5 st 27, 4 x 6", Envelopes: #10, DL, C6 Maximum Paper Size 215 8 x 1200 mm (8.5 x 47.2 x) 5 output (26 m 2 m 2 m 2 m 2 m 2 m 2 m 2 m 2 m 2 m			*4 Default mode in accordan
Output Capacity Up to 20 sheetsPremium Glossy Photo Paper 10 sheets-Envelope, 30 sheets-Postcard Ensign mithindeng, Cuburt Paper Size Legal, Indian-Legal (215, x345 mm), 85 x 13", Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagali (100 x 148 mm), 5 x 7, 4 x 6", Envelopes: #10, DL, C6 Find Margin Ommos, 16, x345 mm, 85 x 13", Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagali (100 x 148 mm), 5 x 7, 4 x 6", Envelopes: #10, DL, C6 Find Margin Ommos, 16, x345 mm, 85 x 13", Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagali (100 x 148 mm), 75, Total C7 Maximum Paper Size 215 8 x 1200 mm (B, 5 x 47, 24.7) Source: IDC Asia-Paolic Cu Find Kees and MFP, Total C7 USB USB 2.0 IMarkinum Paper Size - Find Kees and MFP, Total C7 Network Nork - - - Find Kees and MFP, Total C7 Notwork Management Protocols - - - - Notwork Management Protocols - - - - Printer Software - - - - - Output character Software - - - - - - - - - - - - - - -		100 sheets A4 Plain paper (80 g/m²)	*5 Quoted yields are based of
Output Capacity 30 sheets, A Plain Paper replacement ink bottle puor Paper Size Legal, Indian-Lagal CIS x 345 mm), 8.5 x 13°, Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagaki (100 x 148 mm), reasons including images pri of the ink the Strutz part of the in	input oupdoity		
20 sheets. Premium Glossy Photo Paper ppri to Brain Analysis Paper Size Legal, Indian-Legal (215 x 345 mm), 85 x 13°, Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagaki (100 x 148 mm), 5 x 7°, 4 x 6°, Tendopese: 110, DL, C6 replacement in the bite. AAt, replacement in the bite. At, replacement in the bite. replacement in the bite. replacement in the bite. replacement in	Output Capacity		replacement ink bottles purch
Paper Size Legal, Indian-Legal (215 x 345 mm), 8.5 x 13", Letter, A4, 16K (195 x 270 mm), B5, A5, B6, A6, Hagaki (100 x 148 mm), 5 x 7", 4 x 6", Envelopes: #10, DL, C6 Perintel methods Perintel methods <td></td> <td></td> <td></td>			
S x 7', 4 x 6''. Envelopes: #10, DL, C6 Provide the second s	Paper Size		replacement ink bottles. Actu
Maximum Paper Size 215.9 x 1200 mm (6.5 x 47.24') "Source: IIC Asia-Pacific Out Votime Maximum Paper Size Print Margin 0 mm top, left, right, bottom via custom settings in printer driver" "Tacker 200.0 11 Votime Maximum Paper Size USB USB 2.0 "Generation of the setting of th			reasons including images prir
Print Margin Omm top, left, right, bottom via custom settings in printer driver" Tracker 2020 (01. Votume Not Pate (CMY) + 7 Pate (K) = . USB USB 2.0 COPP is calculated based on Black (4,500 pages) and Con Vetwork Protocol Pate (K) = . COPP is calculated based on Black (4,500 pages) and Con Vetwork Protocol Pate (K) = . COPP is calculated based on genuine ink bottle Vetwork Vetwork Vetwork Nanagement Protocols Vetwork Nanagement Prot	Maximum Paper Size		*Source: IDC Asia-Pacific Our
Interface Printers and MFPs. Total Co USB USB 2.0 Network - Network Protocol - Network Protocol - Network Management Protocols - Mobie and Cloud Printing - Epson Connect - Other Mobile Solutions - Printers of mixe - Other Mobile Solutions - Printers of mixe - Operating System Compatibility Windows XP / Vista / 7 / 8 / 8 / 1 / 10, Windows Server OS, Mac OS X 10.6.8 or later Check Voltage AC 220 – 240 V Rated Voltage AC 220 – 240 V Rated Voltage - Operating 12 W Steep 0.4 W Operating / Paint Byte - Steep 0.4 W Power off 0.3 W Noice Level - Power off 0.3 W Noice Level - Power off 0.3 W Noice Level - Power off 0.3 C C 13100/			Tracker 2020 Q1. Volume Mar
USB USB 2.0 CPP is calculated based on Plack (4/50 page) and Con genuine ink bottles. Queck of genuine ink bottle. Queck of genuine ink bottle. Queck bottle. Queck of genuink bottle. Queck bottle. Queck bot			
Network - - Yellow 7,500 Page) ink botts - Network Management Protocols - - - - Mobile and Cloud Printing - - - - Epson Connect - - - - Other Mobile Solutions - - - - Printer Software - - - - Operating System Compatibility Windows XP / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 - - Operating System Compatibility Windows XP / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 - - Rated Voltage AC 220 - 240 V - - - Rated Voltage AC 220 - 240 V - - - Rated Voltage AC 220 - 240 V - - - Rated Frequency 50 - 60 Hz - - - Power Consumption - - - - - Operating / 12 W - - - - - Standby 3.9 W - - - - Steep 0.4 W - - - - Power off 0.3 W - -	USB	USB 2.0	(CPP) is calculated based on
Network Protocol - <td>Network</td> <td></td> <td></td>	Network		
NetWork Management Protocols - with Epson methodolog. Outor the included bottles jused Mobile and Cloud Printing - - Epson Connect - - Other Mobile Solutions - - Printer Software - - Operating System Compatibility Windows XP / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 with Epson methodolog. Outor do Low printing, tempe may be lower when printing in one ink colour. Ink is use printed print settings, tempe may be lower when printing in one ink colour. Ink is use printed print setting. Cureta do colour printing. Outor do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do colour printing. Outor do Louro the lower than one ink colour. Unit is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Ink is use printed print setting. Cureta do Louro the lower than one ink colour. Cureta do Louro the lower than one ink colour. Cureta do Louro the lower than one ink colour. Cureta do Louro the lower than one ink colour. Cureta do Louro the lower than one ink colour. Cureta do Louro than one than permission	Network Protocol		genuine ink bottles. Quoted y
Mobile and Cloud Printing replacement ink bottles sued the include bottles is used to be lower than those of actual yields vary due to reason of actual yields vary due to	Network Management Protocols		
Epson Connect - - could be lower than those of Actual yields vary due to reas printed, print string, temp and boowr when printing, the to printed, printed, printed			 replacement ink bottles purch
Epson Connect - Actual yields vary due to reaspont the formal printer dynamic stemps and the prespret dynamic st	Mobile and Cloud Printing		
Printer Software may be lower when printing i with one ink colour. Ink is used printing and scanning functions are supported for Windows Server OS, Mac OS X 10.6.8 or later may be lower when printing i with one ink colour. Ink is use printing and colour printing. Queted C Electrical Specifications AC 220 - 240 V Electrical Specifications Electrical Specifications Rated Voltage AC 220 - 240 V 50 - 60 Hz Electrical Specifications Electrical Specifications Power Consumption Operating 12 W Standby 3.9 W Electrical Specifications Standby 3.9 W 0.3 W Standby Standby Standby Sleep 0.4 W Operating / 12 W Standby Standby Noise Level PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Selic Epson India Pvt. Ltd. Reproduction in part or in who permission from Epson, is stand their respective and all rights in those may are simulations only. Specific and their respective and all rights in those may are simulations only. Specific and all rights in those may are simulations only. Specific and availability are subject to cha availa		•	Actual yields vary due to reas
Printer Software Operating System Compatibility Windows XP / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 with one ink colour, printing. Supported for Windows Server OS, Mac OS X 10.6.8 or later with one ink colour, printing. Quoted C Electrical Specifications AC 220 - 240 V			
Electrical Specifications AC 220 - 240 V and colour printing Quoted C Rated Voltage AC 220 - 240 V 50 - 60 Hz Power Consumption 50 - 60 Hz 60 - 60 Hz Operating 3.9 W 3.9 W Standby 3.9 W 3.9 W Steep 0.4 W 0.3 W Power off 0.3 W 0.3 W Noise Level 5.2 B(A), 38 dB (A) PC Printing / Prenium Glossy 5.2 B(A), 52 dB (A) Photo Paper Best Photo 5.2 B(A), 52 dB (A) Consumables Page Yield's Black Ink Bottle 4,500 Ci 3100V298 7,500 (Composite Yield) Ci 3100V298 and able to the construction of the cons	Printer Software		with one ink colour. Ink is use
Electrical Specifications C1310 und scanning functions are supported for Windows Server OS, Mac OS X 10.6.8 or later L3150, L130, L310 and L565. Electrical Specifications AC 220 - 240 V AC 220 - 240 V Rated Voltage AC 220 - 240 V AC 220 - 240 V Bated Frequency 50 - 60 Hz AC 220 - 240 V Power Consumption 0 3.9 W Standby 3.9 W 0.4 W Power off 0.3 W 0.3 W Noise Level PC Printing / Premium Glossy C13100 X198 Photo Paper Default* 6.5 B(A), 52 dB (A) Selico Epson India Pvt. Ltd. Consumables Page Yield*s Order Code Black Ink Bottle 7,500 (Composite Yield) C13100V398 Yellow link Bottle 7,500 (Composite Yield) C13100V398	Operating System Compatibility		
Rated Voltage AC 220 - 240 V Rated Frequency 50 - 60 Hz Power Consumption 12 W Operating 12 W Standby 3.9 W Sleep 0.4 W Power off 0.3 W Noise Level 5.2 B(A), 38 dB (A) PC Printing / Premium Glossy 5.2 B(A), 38 dB (A) Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Gonsumables Page Yield* Black Ink Bottle 4,500 C13T00V298 C13T00V198 Magenta Ink Bottle 7,500 (Composite Yield) C13T00V298 availability are subject to cha vary between countries. Pleater		Only printing and scanning functions are supported for Windows Server OS, Mac OS X 10.6.8 or later	L3150, L130, L310 and L565.
Rated Frequency 50 - 60 Hz Power Consumption 12 W Operating 12 W Standby 3.9 W Sleep 0.4 W Power off 0.3 W Noise Level PC Printing / Premium Glossy Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Consumables Page Yield*s Black Ink Bottle 4,500 C13T00V198 ard are the free trademarks of their respective availability in stores mary and all rights in those mary and availability ary between countries. Please to the countries. Please of their respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha vary between countries. Please of the respective to cha variability ary between countries. Please of the respective to cha variability ary between countries. Please of the respective to cha variability ary between countries. Please of the respective to cha variability ary between countries. Please of the respective to cha variability ary between countries. Please of the respe	•		
Power Consumption 12 W Operating 12 W Standby 3.9 W Sleep 0.4 W Power off 0.3 W Noise Level PC Printing / Premium Glossy Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Consumables Page Yield*s Black Ink Bottle 4,500 C 13T00V298 ard are the trademarks of their respective and all rights in those mark and and rights in those mark	=		
Operating 12 W Standby 3.9 W Sleep 0.4 W Power off 0.3 W Noise Level 0.3 W PC Printing / Premium Glossy Photo Paper Best Photo Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Consumables Page Yield*s Black Ink Bottle 4,500 C13T00V298 and and are the full this presend and are simulations only. Specific availability are subject to cha avail		50 – 60 Hz	
Standby 3.9 W Sleep 0.4 W Power off 0.3 W Noise Level 0.3 W PC Printing / Premium Glossy Photo Paper Best Photo PLO Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default ⁴ 6.5 B(A), 52 dB (A) Consumables Page Yield's Black Ink Bottle 4,500 ClaitTo0V298 ary and are ther trademarks of their respective analysis only. Specific availability ary between countries. Please Wagenta Ink Bottle 7,500 (Composite Yield) Vellow link Bottle ClaitT00V498	•		
Sleep 0.4 W Power off 0.3 W Noise Level PC Printing / Premium Glossy Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Consumables Page Yield* Black Ink Bottle 4,500 Cyan Ink Bottle C13T00V198 Yellow link Bottle 7,500 (Composite Yield) Consposite Yield C13T00V488			
Power off 0.3 W Noise Level PC Printing / Premium Glossy Photo Paper Best Photo 5.2 B(A), 38 dB (A) PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Consumables Page Yield*s Black Ink Bottle 4,500 Cyan Ink Bottle C13T00V198 Magenta Ink Bottle 7,500 (Composite Yield) Consumables 7,500 (Composite Yield)			
Noise Level © 2019 Epson India Pvt. Ltd. PC Printing / Premium Glossy 5.2 B(A), 38 dB (A) and EXCEED YOUR VISION and are the trademarks of their respective trademarks of their respective trademarks of their respective and and rights in those ma are simulations only. Specific availability are subject to chan are simulations only. Specific availability are subject to chan are simulations only. Specific availability are subject to chan availability are subject to cha			
PC Printing / Premium Glossy Be production in part or in why permission nota PVL is perioduction in part or in why permission nota PVL is perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in why permission mater PVL is whether the perioduction in part or in whether the perioduction is whether the perioduction in part or in whether the perioduction is whether the perioduction in part or in whether the perioductin provide the perioduction in perioduction in par		0.3 W	
Photo Paper Best Photo 5.2 B(A), 38 dB (A) permission from Epson, 19 st man de XCEED YOURI VISION 4 PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Selko Epson Corporation. All other company names used 1 Consumables Page Yield*s Order Code purposes only and are ther test of their respective any and all rights in those mar availability in those mar availability as used in to character on the composite Yield) Cyaling Kottle 7,500 (Composite Yield) C13T00V498 availability as used to character on those on the composition on the company and set of the respective any and all rights in those mar availability are subject to character on the composition on the composition on the composition on the company between countries. Plane			© 2019 Epson India Pvt. Ltd.
Prioto Paper Best Prioto 3.2 b(x), 30 db (x) and EXCEED VOLR VISION A PC Printing / Plain Paper Default* 6.5 B(A), 52 dB (A) Selko Epson Corporation. All other company names used I Consumables Page Yield*s Order Code other company names used I Black Ink Bottle 4,500 C13T00V198 and EXCEED VOLR VISION A Cyan Ink Bottle C13T00V298 any and all rights in those ma are simulatify are subject to cha variability are subject to cha Velow Ink Bottle 7,500 (Composite Yield) C13T00V488 variability are subject to cha			
Consumables Page Yield*5 Order Code other company names used I purposes only and are the tra burnes only and are the tra- trademarks of their respective any and all rights in those ma are simulations only. Specific availability are subject to cha vary between countries. Plea Value units Rottle 7,500 (Composite Yield) C13T00V498 availability are subject to cha vary between countries. Plea			and EXCEED YOUR VISION a
Page Held Page Held Other Code purposes only and are the trae Black Ink Bottle 4,500 C13T00V198 any and all rights in those me are simulatify and so their respective any and all rights in those me are simulatify and so their respective availability are subject to cha Valuew Ink Bottle 7,500 (Composite Yield) C13T00V498 availability are subject to cha			
Cyan Ink Bottle C13T00V298 any and all rights in those ma are simulations only. Specific availability specific availability are subject to cha Magenta Ink Bottle 7,500 (Composite Yield) C13T00V398 availability are subject to cha Yellow Ink Bottle C13T00V488 variability are subject to cha			 purposes only and are the tra
Open ink Bottle C13T00V28 are simulating only. Specific Magenta Ink Bottle 7,500 (Composite Yield) C13T00V398 availability are subject to cha Vellow Ink Bottle C13T00V498 vary between countries. Plea			
Yellow Ink Bottle C13T00V498 vary between countries. Plea			are simulations only. Specifica
	-		availability are subject to char vary between countries. Pleas
		J 0101004430	

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080 4566 5000. Fax: 080 4566 5005

Regional Offices:

Clean

clean

EPSON

Ahmedabad - 3314 8500/01, Chennai - 3967 7500, Cochin - 4012 315, Coimbatore - 98942 19200, Hyderabad - 4857 0032, Jaipur - 78699 11699, Kolkata - 4603 4714/15/29/30, Mumbai - 3079 8200, New Delhi - 3312 0300, Pune - 3028 6000/05

For service - 1800 123 001 600 (9AM - 6PM) (Mon - Sat)

Epson Helpline: For product info, service or to order an ink bottle - 1800 425 0011



www.epson.co.in

1 Print speed (Pages Per Minute) is calculated when printed on A4 plain paper in the fastest mode, 10 x 15 m photo print speed when printed on Epson Premium Blossy Photo Paper. Print speed may vary depending on ystem configuration, print mode, document complexity, oftware, type of paper used and connectivity. Print peed does not include processing time on host computer



When printed on Epson Premium Glossy Photo Paper. Borderless printing is supported up to 4R (4 x 6"), otherwise 3 mm top, left, right, bottom.

*4 Default mode in accordance with ISO7779 for MFPs. *5 Quoted yields are based on the ISO 24711/24712 patterns of mixed text and colour graphics with Epson methodology. Quoted yields are based on the replacement ink bottles purchased. For print quality, part of the ink from the included bottles is used for printer startup so yields could be lower than those of replacement ink bottles. Actual yields will vary due to reasons including images printed, print settings,

*Source: IDC Asia-Pacific Quarterly Hardcopy Peripherals Tracker 2020 Q1. Volume Market Share of A4 Inkjet Printers and MFPs. 'Total Colour Cost Per Print - 18 Paise (CMY) + 7 Paise (K) = 25 Paise. Cost Per Print (CPP) is calculated based on quoted Page Yield for Black (4,500 pages) and Composite (Cyan/Magenta/ Yellow - 7,500 Pages) ink bottles, and MRP of Epson genuine ink bottles. Quoted yields are based on the ISO 24711/24712 patterns of mixed text and colour graphics with Epson methodology. Quoted yields are based on the replacement ink bottles purchased. Part of the ink from the included bottles is used for printer startup so yields could be lower than those of replacement ink bottles. Actual yields vary due to reasons including images printed, print settings, temperature and humidity. Yields may be lower when printing infrequently or predominantly with one ink colour. Ink is used for both printing and printelader maintenance. All inks are used for both black and colour printing. Quoted CPP applicable for L3110, L3150, L130, L310 and L565.

© 2019 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Information correct at time of printing Printed June 2020.

