

6V 225Ah FFP BATTERY



Organize Sanayi Bölgesi Türkmenistan Caddesi No:27
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

endustriyel@yigitaku.com – www.yigitaku.com.tr


- ✂ Long Life
- ✂ Production of Special Design Plates and Active Materials
- ✂ Resistant to Deep Discharge
- ✂ Special Grid Alloy and Minimum Internal Resistance

Applications

- ✂ Industrial lifting Vehicles
- ✂ Ground Support Equipment
- ✂ Fun Trains
- ✂ Cleaning Machines
- ✂ Lifting Platforms
- ✂ Auto – Guided Vehicles (AGV)
- ✂ Golf Cars

Code	Design Number	Voltage [V]	Capacity [Ah]	Box Type	Weight $\pm\%3$ [Kg]	Dimensions L/W/h (mm)	Capacity (Ah)				Term. Type
							C20	C10	C5	C3	
YFFP6-225	27252073	6	225	GU	30,5	261/181/252-281	225	207	185	149,1	Screw 5/16

Electrolit Type	Liquid
Cutoff Voltage at Deep Discharge	1,70 VDC @ (A) $\leq 0,2Cs$
Storage Time	6 Month @ 25 °C
Self Discharge	%5-15 per month depending on storage temperature
Cell Float Voltage (VDC @ 25 °C)	2,25 \pm %1
Cell Cycle Voltage (VDC @ 25 °C)	2,47 \pm %1
Balancing Cell Voltage (VDC @ 25 °C)	2,55 \pm %1

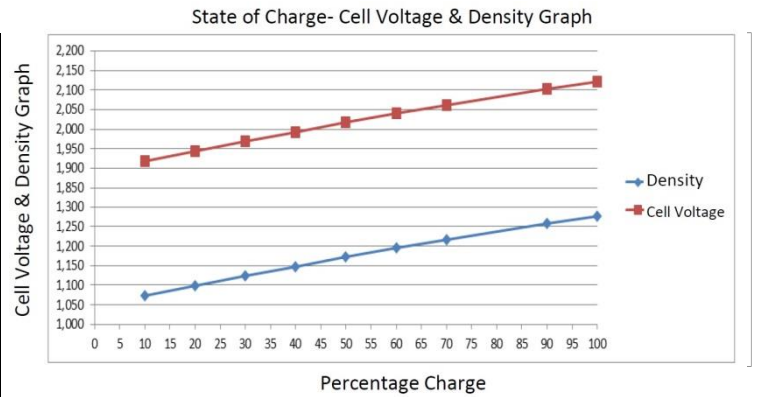

Screw 5/16



Organize Sanayi Bölgesi Türkmenistan Caddesi No:27
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

endustriyel@yigitaku.com – www.yigitaku.com.tr