

6V 240Ah FFP BATTERY



Organize Sanayi Bölgesi Türkmenistan Caddesi No:27
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

endustriyel@yigitaku.com – www.yigitaku.com.tr


- ✘ Long Lifet
- ✘ Resistant to Deep Discharge
- ✘ Made From Specially Designed Plate and Active Material
- ✘ Special Grid Alloy and Minimum Possible Internal Resistant

Applications

- ✘ Industrial Lifting Machines
- ✘ Fun Trains
- ✘ Lifting Platforms
- ✘ Golf Vehicles
- ✘ Ground Support Equipment
- ✘ Cleaning Machinery
- ✘ Automatically Guided Vehicles (AGV)

Code	Design Number	Voltage [V]	Capacity [Ah]	Box Type	Weight ± 3 [Kg]	Dimensions L/W/h (mm)	Capacity(Ah)				Term. Type.
							C20	C10	C5	C3	
YFFP6-240	27402018	6	240	GU	32,2	261/181/252-281	240	220	197	158	Screw 5/16

Electrolite Type	Liquid
Discharge Breake Voltage at D.O.D.	1,70 VDC @ (A) $\leq 0,2Cs$
Storage Period	6 Monts @ 25 °C
Self Discharge	5% to 15% per month depending on storage temperature
Cell Float Voltage (VDC @ 25 °C)	2,25 \pm %1
Cell Cycle Voltage (VDC @ 25 °C)	2,47 \pm %1
Balancing Cell Voltage (VDC @ 25 °C)	2,55 \pm %1

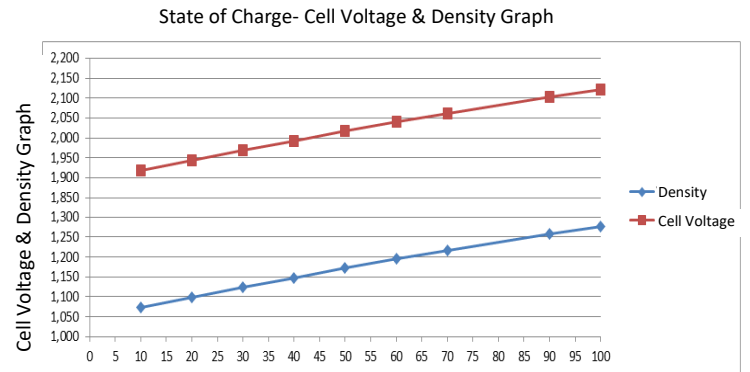

State of Charge
Screw 5/16



Organize Sanayi Bölgesi Türkmenistan Caddesi No:27
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

endustriyel@yigitaku.com – www.yigitaku.com.tr