

## 6V 190Ah FFP BATTERY



Organize Sanayi Bölgesi Türkmenistan Caddesi No:27  
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

[endustriyel@yigitaku.com](mailto:endustriyel@yigitaku.com) – [www.yigitaku.com.tr](http://www.yigitaku.com.tr)


- ✘ Long Lifetime
- ✘ Resistant to Deep Discharge
- ✘ Made from specially designed plate and active material
- ✘ Special grid alloy and minimum possible internal resistance

## Applications

- ✘ Industrial Lifting Vehicles
- ✘ Fun Trains
- ✘ Lifting Platforms
- ✘ Golf Vehicles
- ✘ Ground Support Equipment
- ✘ Cleaning Machinery
- ✘ Automatically Guided Vehicles (AGV)

Code	Design Number	Voltage [V]	Capacity [Ah]	Box Type	Weight $\pm 3$ [kg]	Dimensions L/W/h (mm)	Capacity (Ah)				Terminal Type
							C20	C10	C5	C3	
YFFP6-190	26902031E	6	190	GU	28,8	261/181/252-281	190	174	156	126	5/16 Screw

Electrolyte Type	Liquid
Discharge Break Voltage at D.O.D.	1,70 VDC @ (A) $\leq 0,2C_5$
Storage Period	6 Months @ 25 °C
Self Discharge	5% to %15 per month depending on storage temperature
Cell Float Voltage (VDC @ 25 °C)	2,25 $\pm$ %1
Cell Cycle Voltage (VDC @ 25 °C)	2,47 $\pm$ %1
Balancing Cell Voltage (VDC @ 25 °C)	2,55 $\pm$ %1

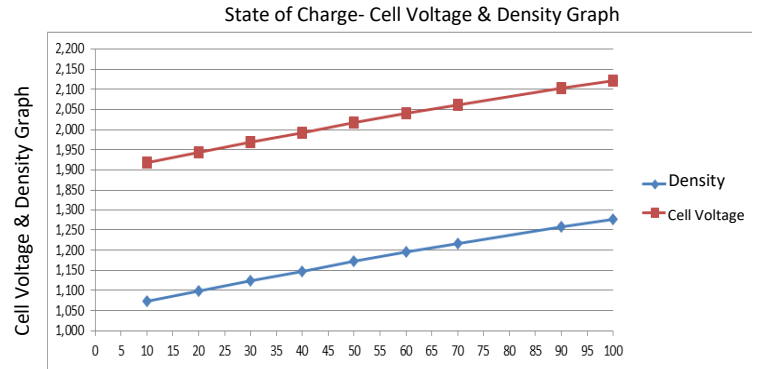

Organize Sanayi Bölgesi Türkmenistan Caddesi No:27  
Sincan/ANKARA

Tel: +90 312 276 46 39 Fax: +90 312 267 08 61

endustriyel@yigitaku.com – www.yigitaku.com.tr