

EPL type batteries are made in AGM technology and are constructed by plates, separators, safety valves and a container. Since the electrolyte is held by a glass-mat separator and plates, the batteries can be used in any chosen position without the risk of leakage. EPL type batteries have a pressure relief valves that allows safe dispersal of any excess pressure inside the cell (VRLA). EPL batteries are characterized by a longer design life which, according to Eurobat, is 15+ years. Due to their advantages such as being well sealed, maintenance free and having a low internal resistance and long term storage, EPL batteries have been chosen for the base of emergency power supplying.




TECHNICAL DATA

Nominal voltage	12 V	
Nominal capacity	210 Ah / C ₂₀	
Cell per unit	6	
Technology	AGM	
Design life	over 15 years @ 20°C* over 12 years @ 25°C	
Dimensions	height	220,0 mm
	length	522,0 mm
	width	240,0 mm
Weight	~73,2 kg	
	210,0 Ah	
Capacity @ 25°C Przy 1,75V/ogniwo	20h 10,5A @ 1,75V/cell	199,5 Ah
	10h 19,95A @ 1,75V/cell	178,5 Ah
	5h 35,70A @ 1,75V/cell	139,0 Ah
	1h 139,0A @ 1,50V/cell	0°C ~ 40°C
Ambient nominal temperature range	charge	-20°C ~ 50°C
	discharge	-20°C ~ 40°C
	storage	≤2,5 mΩ
Internal resistance @ fully charge battery	13,5V to 13,8V (-18 mV/°C)	
Charging voltage @ 20°C	standby use	14,4 V to 15,0V (-24 mV/°C)
	cycle use	21 A
Charging current	recommended	63 A
	maximum	800 A
Maximum discharge current (for 5 sec)	97 %	
Capacity retention during storage @ 20°C (self discharge)	after 1 month	80 %
	after 6 months	63 %
	after 12 months	ABS UL 94-HB
Container material	standard	ABS UL 94-V0**
	optional	I3
Terminal	insert terminal	10,0 Nm
Terminal hardware initial torque		


APPLICATIONS

- uninterruptible power supplies (UPS)
- emergency lighting systems
- telecommunication PABX
- cash registers and fiscal printers
- fire and security systems
- marine
- solar powered systems
- golf-carts, wheelchairs
- medical, laboratory equipment
- mobile and portable equipment – cycle use
- measuring devices
- fishing lights

DIMENSIONS

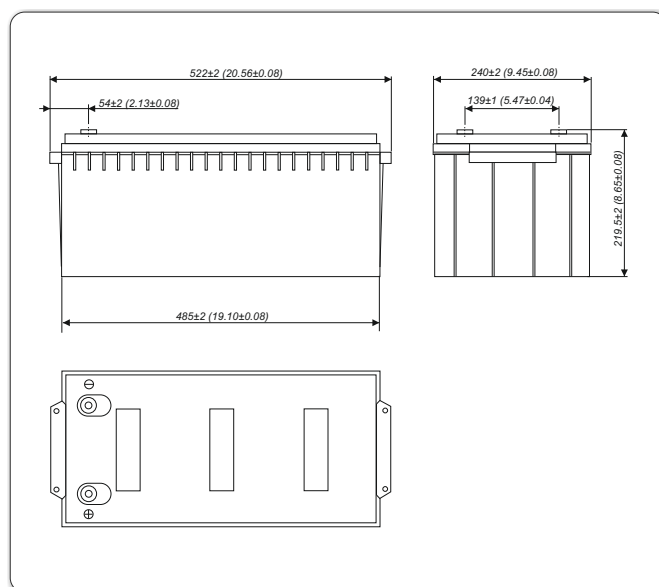

TERMINALS

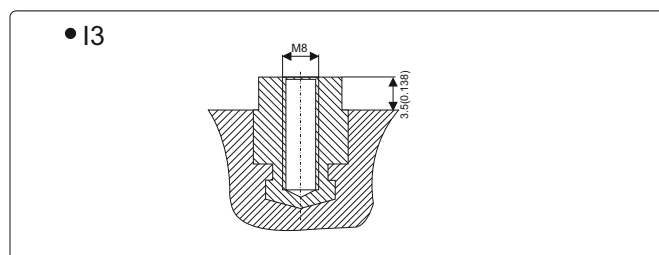

*-) - According to Eurobat (Very Long Life group) **-) - Flame-retardant

NO TRANSPORT RESTRICTED

Not restricted for air, surface and water transport. Classified as non-hazardous material (IATA/ICAO Special Provision A67, DOT-CFR Title 49 parts 171-189, IMDG amendment 27)

DISCHARGE CHARACTERISTICS

• Constant current (Current [A], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,80	506,0	414,0	340,0	226,0	146,0	128,0	70,00	41,10	30,30	23,69	19,65
1,75	596,0	448,0	356,0	234,0	151,0	132,0	71,80	41,80	30,80	24,04	19,95
1,70	633,0	465,0	367,0	240,0	154,0	135,0	72,80	42,10	31,00	24,17	20,05
1,65	662,0	476,0	375,0	243,0	156,0	136,0	73,40	42,30	31,10	24,23	20,10
1,60	684,0	485,0	383,0	246,0	157,0	138,0	74,00	42,50	31,10	24,26	20,10
1,50	711,0	495,0	390,0	248,0	159,0	139,0	74,60	42,70	31,20	24,26	20,11

• Constant power (Power [W/cell], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,80	935,3	783,7	651,7	444,0	289,3	254,8	140,0	82,2	60,7	47,4	39,3
1,75	1082,5	848,8	681,8	461,0	298,7	262,3	143,7	83,7	61,7	48,1	39,9
1,70	1150,0	879,5	702,8	471,5	304,7	267,2	145,5	84,2	62,0	48,3	40,1
1,65	1201,8	900,5	719,0	478,0	308,3	270,3	146,8	84,7	62,2	48,5	40,2
1,60	1241,7	918,7	733,3	483,0	311,5	273,0	148,0	85,0	62,3	48,5	40,2
1,50	1291,3	936,8	748,2	487,8	314,5	275,7	149,2	85,3	62,3	48,5	40,2

F.V. - Final voltage


Battery life characteristics of standby use

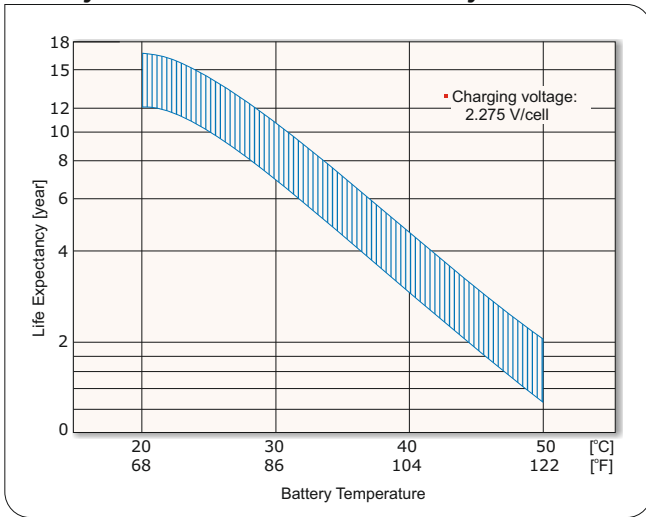


Battery life characteristics of cycle use

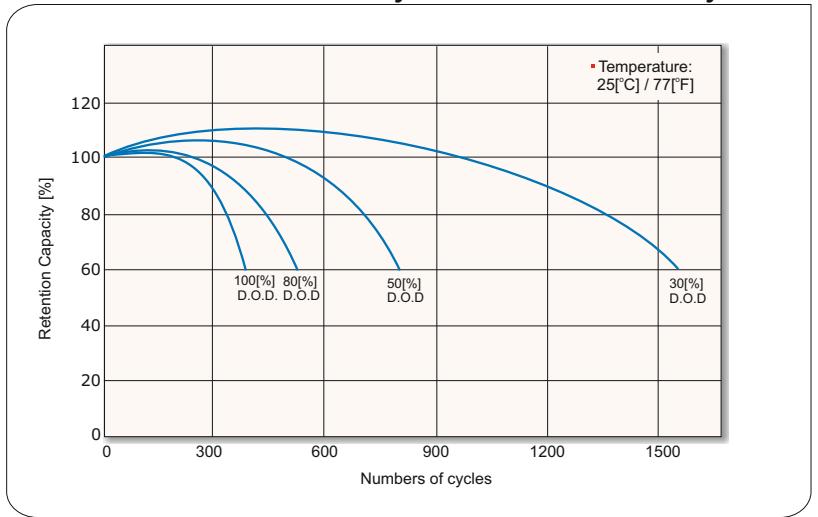


Battery discharge characteristics

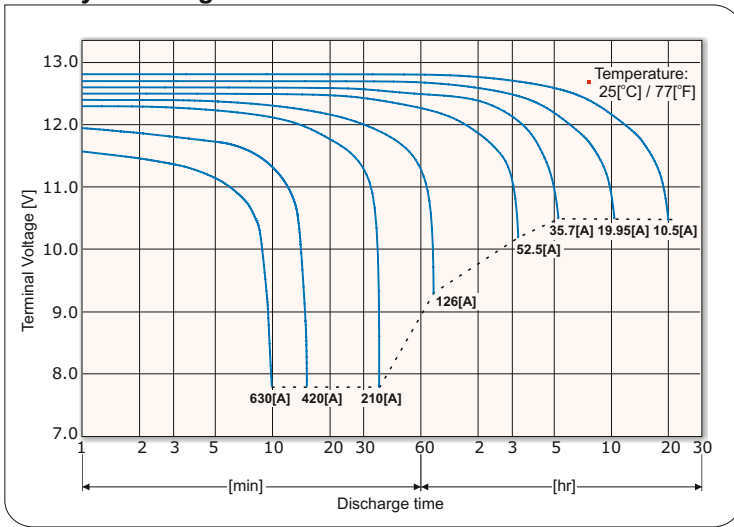


Battery self discharge characteristics

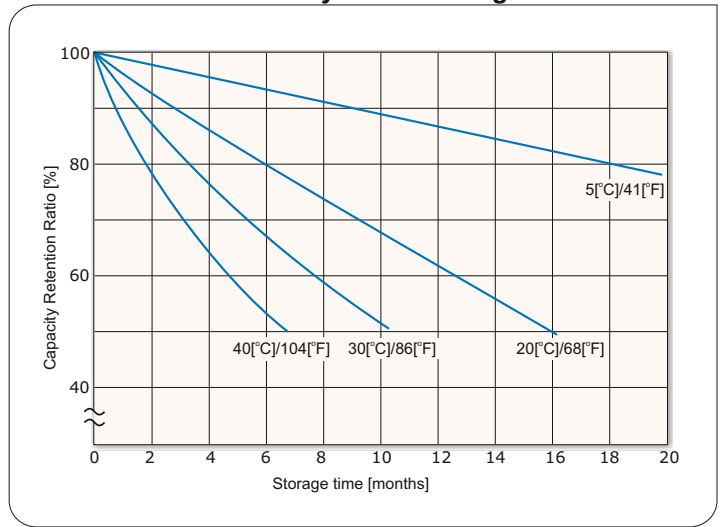

Battery charging characteristics for the standby use

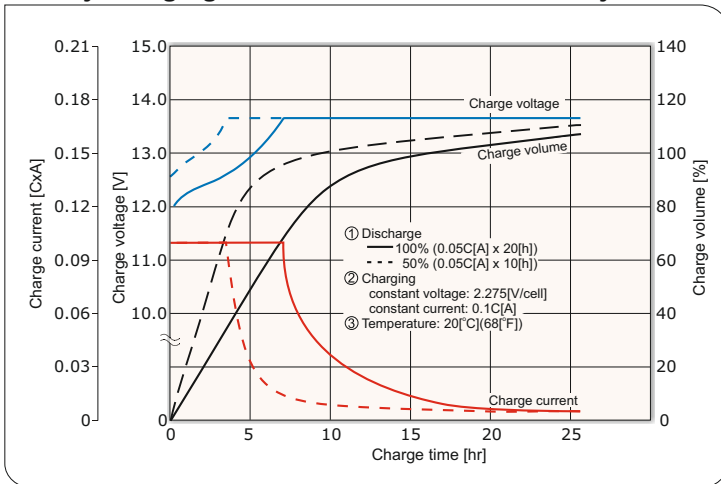

Battery charging characteristics for the cycle use

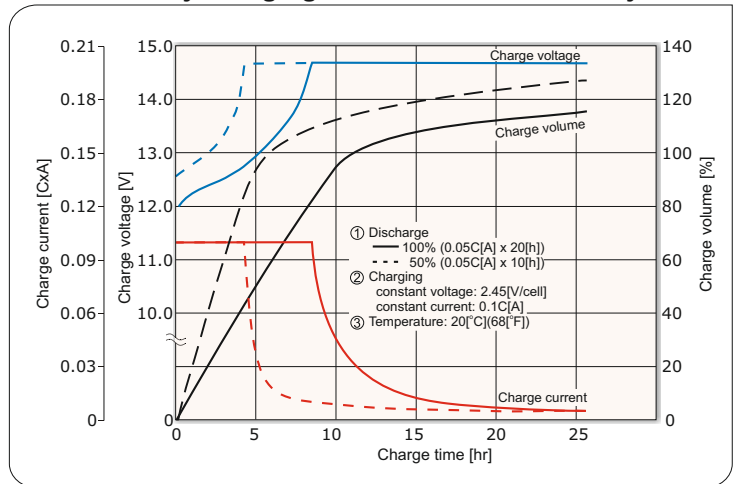

Battery discharge current and final discharge voltage

Discharge current [A]	42 > I	42 ≤ I < 105	105 ≤ I < 210	210 ≤ I
Final discharge voltage [V/cell]	1.75	1.70	1.55	1.30



*) C - Capacity